


Povežite opremu kao na slici:

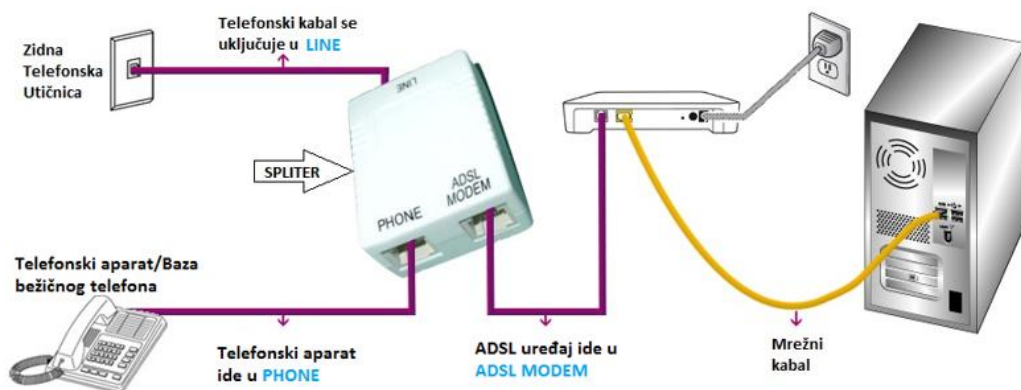

Potrebno je da pristupite ruteru tako što ćete otvoriti pretraživač i u adres bar upisati: **192.168.1.1**. Otvoriće se prozor u kome treba da se unese za username **“admin”** i za password **“admin”**. Nakon ovog koraka moguće je podesiti uređaj.

Podešavanje konekcije

Izaberite u meniju opciju **“Advanced Setup”** i podopciju **“WAN”**.

Kliknite na dugme **“Add”**.

Za **VPI** upišite **8**, a **VCI** upišite **35**, kliknite na dugme **“Next”**.

Izaberite opciju **“PPP over Ethernet (PPPoE)”**

Kliknite na dugme **“Next”**.

The screenshots show the following steps in the router's configuration interface:

- WAN Setup:** The 'WAN' menu item is selected in the left sidebar. The 'Add' button is highlighted in the 'Wide Area Network (WAN) Setup' section.
- ATM PVC Configuration:** The 'VPI' field is set to 8 and the 'VCI' field is set to 35. The 'Service Category' is set to 'UBR Without PCR'. The 'Next' button is highlighted.
- Connection Type:** The 'PPP over Ethernet (PPPoE)' radio button is selected under 'Connection Type'. The 'Next' button is highlighted.

PPP Username – upišite Vaš user name /korisničko ime/ sa Ugovra u obliku **username@beotel**


PPP Password – upišite Vašu lozinku sa Ugovra (velika i mala slova su bitna)

Klinite na dugme **“Next”**.

Klinite na dugme **“Next”**.

Klinite na dugme **“Save”**.

Klinite na dugme **“Save/Reboot”**.

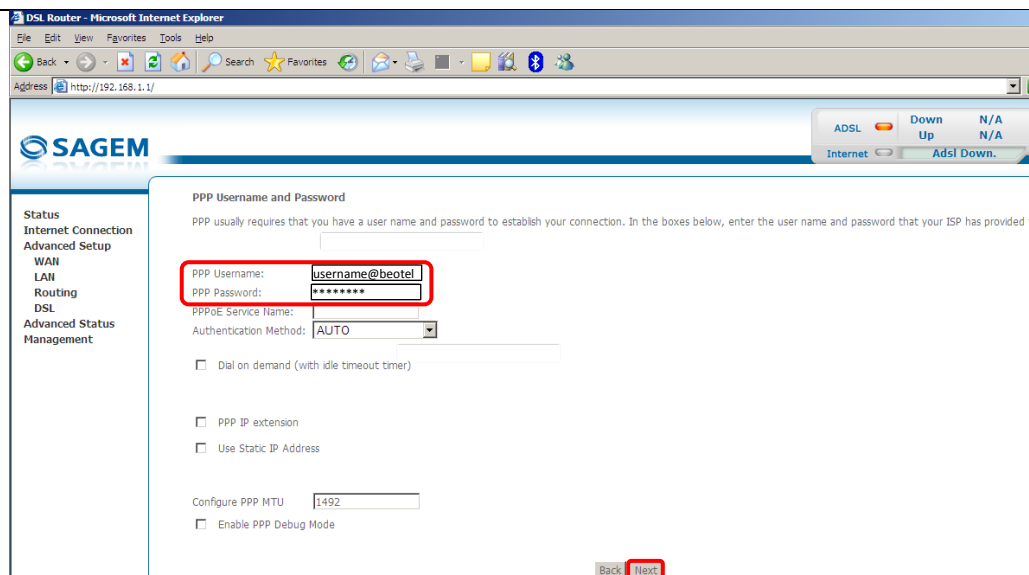

DSL Router - Microsoft Internet Explorer
Address: http://192.168.1.1/

SAGEM


ADSL Down N/A
Up N/A
Adsl Down.

Status
Internet Connection
Advanced Setup
WAN
LAN
Routing
DSL
Advanced Status
Management

PPP Username and Password
PPP usually requires that you have a user name and password to establish your connection. In the boxes below, enter the user name and password that your ISP has provided

PPP Username:
 PPP Password:
 PPPoE Service Name:
 Authentication Method:
 Dial on demand (with idle timeout timer)
 PPP IP extension
 Use Static IP Address
 Configure PPP MTU:
 Enable PPP Debug Mode

Back Next

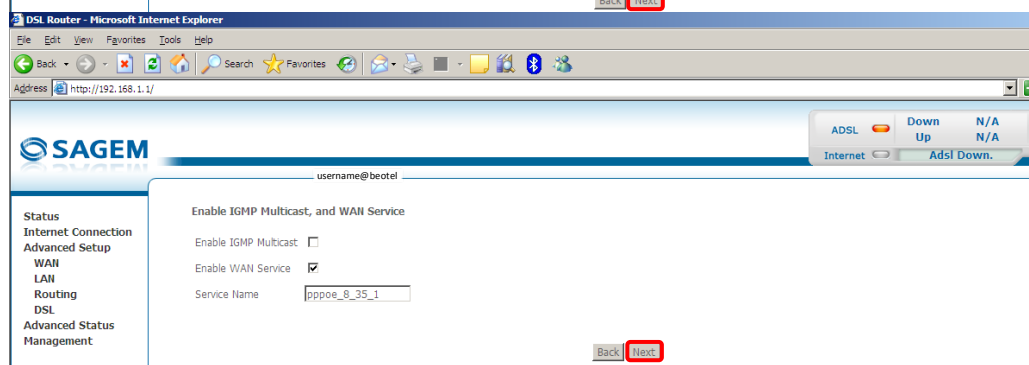

DSL Router - Microsoft Internet Explorer
Address: http://192.168.1.1/

SAGEM

ADSL Down N/A
Up N/A
Adsl Down.


username@beotel

Status
Internet Connection
Advanced Setup
WAN
LAN
Routing
DSL
Advanced Status
Management

Enable IGMP Multicast, and WAN Service

Enable IGMP Multicast:
 Enable WAN Service:
 Service Name:

Back Next

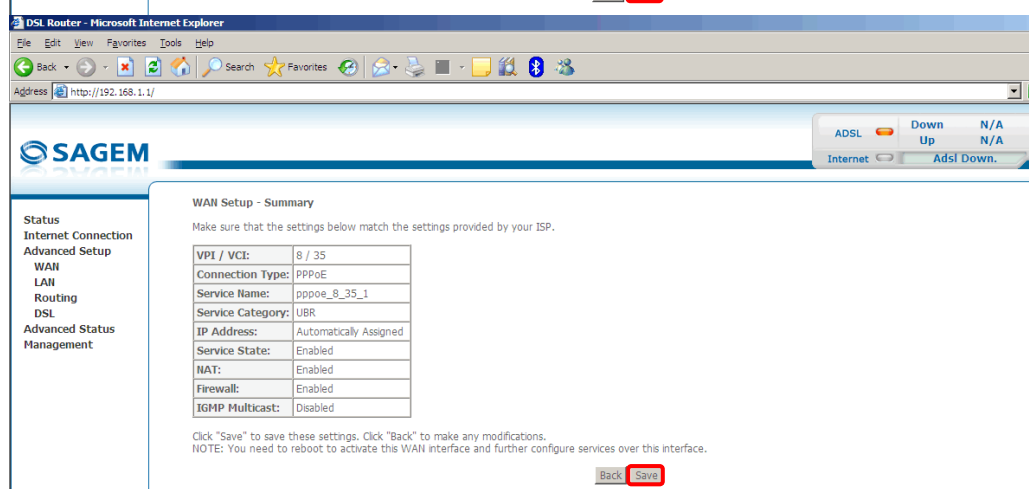

DSL Router - Microsoft Internet Explorer
Address: http://192.168.1.1/

SAGEM

ADSL Down N/A
Up N/A
Adsl Down.


Status
Internet Connection
Advanced Setup
WAN
LAN
Routing
DSL
Advanced Status
Management

WAN Setup - Summary
Make sure that the settings below match the settings provided by your ISP.

VPI / VCI:	8 / 35
Connection Type:	PPPoE
Service Name:	pppoe_8_35_1
Service Category:	UBR
IP Address:	Automatically Assigned
Service State:	Enabled
NAT:	Enabled
Firewall:	Enabled
IGMP Multicast:	Disabled

Click "Save" to save these settings. Click "Back" to make any modifications.
NOTE: You need to reboot to activate this WAN interface and further configure services over this interface.

Back Save

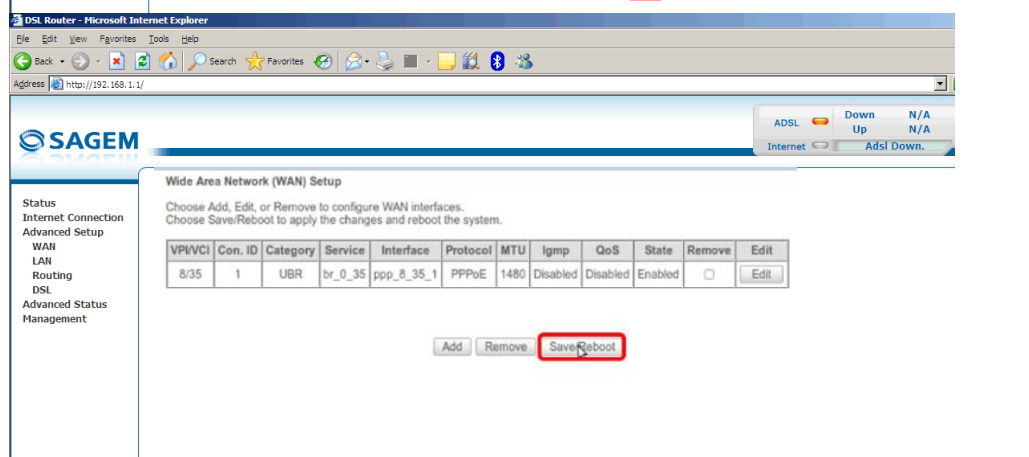

DSL Router - Microsoft Internet Explorer
Address: http://192.168.1.1/

SAGEM

ADSL Down N/A
Up N/A
Adsl Down.

Status
Internet Connection
Advanced Setup
WAN
LAN
Routing
DSL
Advanced Status
Management





Wide Area Network (WAN) Setup
Choose Add, Edit, or Remove to configure WAN interfaces.
Choose Save/Reboot to apply the changes and reboot the system.

VPI/VCI	Con. ID	Category	Service	Interface	Protocol	MTU	Igmp	QoS	State	Remove	Edit
8/35	1	UBR	br_0_35	ppp_8_35_1	PPPoE	1480	Disabled	Disabled	Enabled	<input type="checkbox"/>	Edit

Add Remove Save/Reboot

Sačekati 3 minuta da se restartuje ruter i da se uspostavi internet konkcija.

Svetlosni indikatori (sijalice)

 Power	svetli	uređaj je uključen
	ne svetli	uređaj je isključen
 Link (ADSL)	ne svetli	nema ADSL signala
	treperi	sinhronizuje se
	svetli	ima ADSL signal
 Ethernet (LAN port)	svetli	uključen uređaj u taj LAN port
	ne svetli	nema priključenog uređaja u tom LAN portu
 Data / Internet	svetli (sa treperenjem)	uspostavljena internet konekcija
	ne svetli	nije uspostavljena internet konekcija