



Povežite opremu kao na slici:

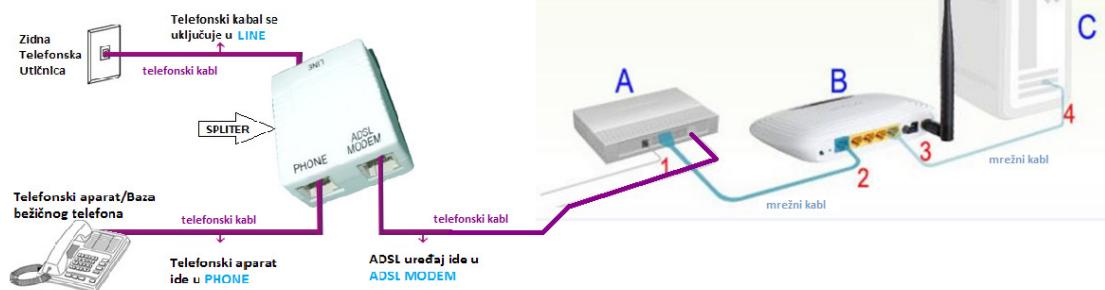

Potrebno je da pristupite ruteru tako što ćeće otvoriti pretraživač i u address bar upisati: **192.168.0.1**. Otvoriće se prozor u koji treba da se unese za username "**admin**" i za password "**admin**". Nakon ovog koraka moguće je podešiti uređaj.

Izaberite u meniju opciju "**Wireless**" i podopciju "Wireless settings".

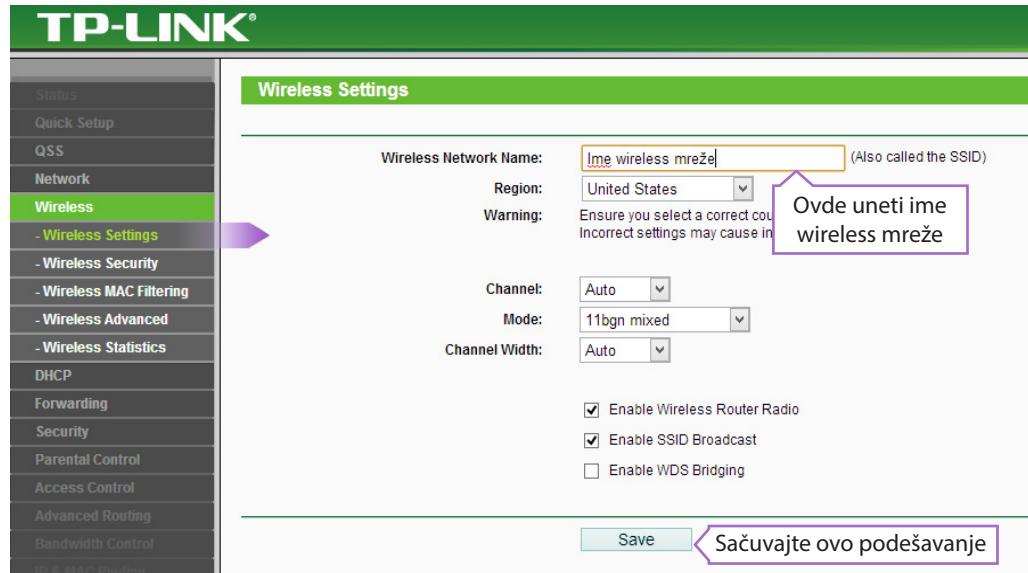

Wireless Settings

Wireless Network Name: (Also called the SSID)

Region: United States

Warning: Ensure you select a correct country. Incorrect settings may cause interference.

Channel: Auto

Mode: 11bgn mixed

Channel Width: Auto


Enable Wireless Router Radio

Enable SSID Broadcast

Enable WDS Bridging

Save Sačuvajte ovo podešavanje

Izaberite podopciju "Wireless security".

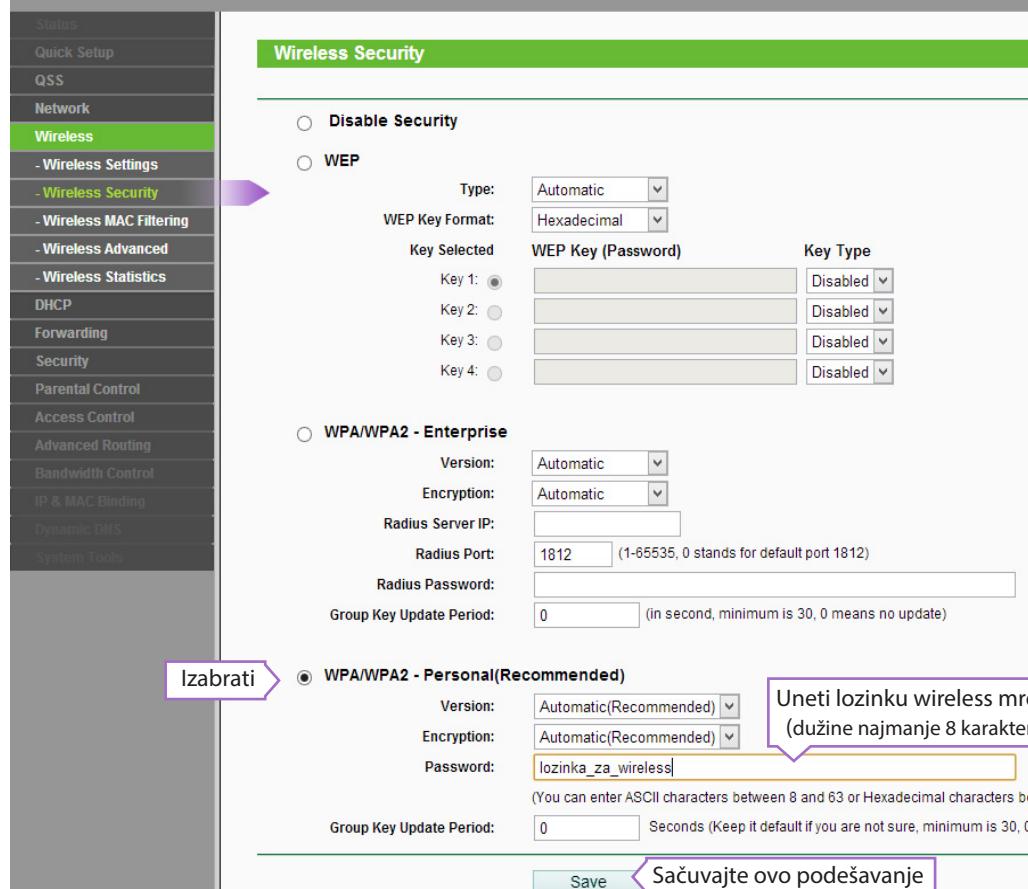

Wireless Security

Disable Security

WEP

Type: Automatic

WEP Key Format: Hexadecimal

Key Selected: Key 1

WEP Key (Password):

Key Type: Disabled

Key 2:

Key 3:

Key 4:

WPA/WPA2 - Enterprise

Version: Automatic

Encryption: Automatic

Radius Server IP:

Radius Port: 1812 (1-65535, 0 stands for default port 1812)

Radius Password:

Group Key Update Period: 0 (in second, minimum is 30, 0 means no update)

WPA/WPA2 - Personal(Recommended)

Version: Automatic(Recommended)

Encryption: Automatic(Recommended)

Password:

(You can enter ASCII characters between 8 and 63 or Hexadecimal characters between 10 and FF)

Group Key Update Period: 0 Seconds (Keep it default if you are not sure, minimum is 30, 0)

Save Sačuvajte ovo podešavanje

1. Uređaj ispred ostvaruje PPPoE konekciju – ako je ovo slučaj, ne treba ništa podešavati jer je fabrički ovako podešeno.

Izaberite "Network" i podopciju "WAN".

The screenshot shows the WAN configuration page. The left sidebar has "Network" selected under "WAN". The main area shows "WAN Connection Type" set to "Dynamic IP". Other fields include IP Address (10.9.8.218), Subnet Mask (255.255.255.0), Default Gateway (10.9.8.25), MTU Size (1500), and DNS servers (Primary: 10.9.8.20, Secondary: 10.9.8.21). A purple callout points to the "Izabratи" button at the top right. A purple arrow points from the "Network" section in the sidebar to the "WAN Connection Type" field.

2. Uređaj ispred u bridge modu, ruter ostvaruje PPPoE konekciju.

The screenshot shows the WAN configuration page. The left sidebar has "Network" selected under "WAN". The main area shows "WAN Connection Type" set to "PPPoE/Russia PPPoE". Under "PPPoE Connection", fields include User Name (username@beotel) and Password (redacted). A purple callout points to the "Izabratи" button at the top right. Another purple callout points to the "User Name" field with the note: "uneti korisničko ime sa nastavkom @beotel, lozinku i potvrditi lozinku". A purple arrow points from the "Network" section in the sidebar to the "WAN Connection Type" field.

3. Restartujte uređaj klikom na dugme "Reboot".

Izaberite "System tools" i podopciju "Reboot".

The screenshot shows the Reboot configuration page. The left sidebar has "System Tools" selected under "Reboot". The main area has a button labeled "Click this button to reboot the device." and a "Reboot" button. A purple arrow points from the "Reboot" section in the sidebar to the "Reboot" button.