


Povežite opremu kao na slici:



Potrebno je da pristupite ruteru tako što ćete otvoriti pretraživač i u address bar upisati: **192.168.1.1**. Otvoriće se prozor u koji treba da se unese za username "**admin**" i za password "**admin**". Nakon ovog koraka moguće je podesiti uređaj.

## Podešavanje interneta

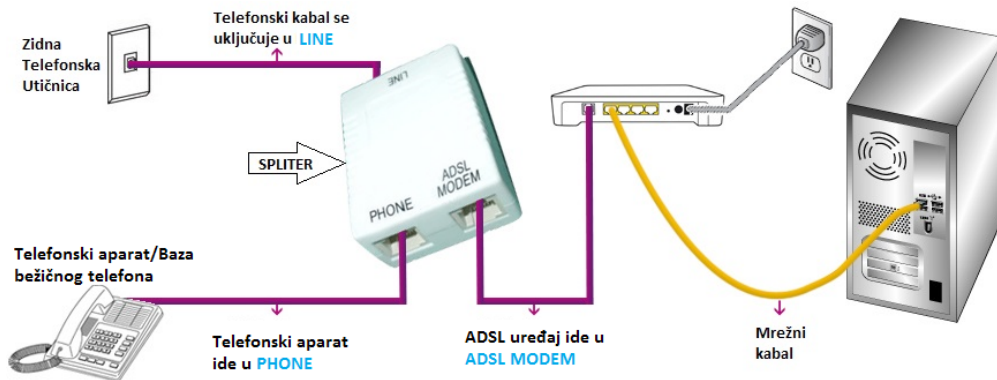

Izabrati

150Mbps Wireless N ADSL2+ Modem Router

Izaberite u meniju opciju "**Interface Setup**" i podopciju "**Internet**".

Interface	Quick Start	Interface Setup	Advanced Setup	Access Management	Maintenance	Status	Help
	Internet	LAN	Wireless				
<b>ATM VC</b>							
Virtual Circuit :		PVC4	PVCs Summary				
Status :		<input checked="" type="radio"/> Activated <input type="radio"/> Deactivated					
VPI :		8	(range: 0~255)				
VCI :		35	(range: 1~65535)				
<b>QoS</b>							
ATM QoS :		UBR					
PCR :		0	cells/second				
SCR :		0	cells/second				
MBS :		0	cells				
<b>Encapsulation</b>							
ISP :		<input type="radio"/> Dynamic IP Address <input type="radio"/> Static IP Address <input checked="" type="radio"/> PPPoA/PPPoE <span style="border: 1px solid black; padding: 2px;">Izabrati</span> <input type="radio"/> Bridge Mode					
<b>PPPoE/PPPoA</b>							
Service name :		[ ] <span style="border: 1px solid black; padding: 2px;">Service name - prazno</span>					
Username :		username@beotel <span style="border: 1px solid black; padding: 2px;">Username sa ugovora</span>					
Password :		[ ] <span style="border: 1px solid black; padding: 2px;">Password sa ugovora</span>					
Encapsulation :		PPPoE LLC					
Bridge Interface :		<input type="radio"/> Activated <input checked="" type="radio"/> Deactivated					
<b>Connection Setting</b>							
Connection :		<input checked="" type="radio"/> Always On (Recommended) <input type="radio"/> Connect On-Demand (Close if idle for [0] minutes) <input type="radio"/> Connect Manually					
TCP MSS Option :		TCP MSS(default:1400) [1400] bytes					
<b>IP Address</b>							
Get IP Address :		<input type="radio"/> Static <input checked="" type="radio"/> Dynamic					
Static IP Address :		0.0.0.0					
IP Subnet Mask :		0.0.0.0					
Gateway :		0.0.0.0					
NAT :		Enable					
Default Route :		<input checked="" type="radio"/> Yes <input type="radio"/> No					
TCP MTU Option :		TCP MTU(default:1480) [1480] bytes					
Dynamic Route :		RIP2-B Direction: Both					
Multicast :		Disabled					
MAC Spoofing :		<input type="radio"/> Enabled <input checked="" type="radio"/> Disabled					
		00:00:00:00:00:00					
<b>SAVE</b>							

Kod opcije "**ISP**" štiklirajte treću opciju "**PPPoA/PPPoE**".

Otvaraju se opcije:

**Service name** – ostavite prazno

**Username** – upišite Vaš username / korisničko ime sa Ugovora u obliku *username@beotel*

**Password** – upišite Vašu lozinku sa Ugovora (velika i mala slova su bitna)

Kliknite na dugme "**Save**" (ostaće na istoj strani kad sačuva podatke).

## Podešavanje wireless-a

**TP-LINK®**

150Mbps Wireless N ADSL2+ Modem Router

Izaberite u meniju opciju "Interface Setup" i podopciju "Wireless".

Izabrati

Quick Start
Interface Setup
Advanced Setup
Access Management
Maintenance
Status
Help

Internet
LAN
Wireless

---

Access Point Settings

Access Point:  Activated  Deactivated

Channel: UNITED STATES  Current Channel: 1

Transmit Power: High

Beacon Interval(ms): 100 (range: 20~1000)

RTS/CTS Threshold: 2347 (range: 1500~2347)

Fragmentation Threshold(bytes): 2346 (range: 256~2346, even numbers only)

DTIM(ms): 1 (range: 1~255)

Wireless Mode: 802.11b+g+n

---

11n Settings

Channel Bandwidth: 20/40 MHz

Extension Channel: above the control channel

Guard Interval: AUTO

MCS: AUTO

---

Multiple SSIDs Settings

SSID Index: 1

Broadcast SSID:  Yes  No

Use WPS:  Yes  No

SSID: Imemreže Uneti ime mreže

Authentication Type: WPA-PSK/WPA2-PSK Izabrati WPA-PSK/WPA2-PSK

---

WPA-PSK/WPA2-PSK

Encryption: TKIP/AES

Pre-Shared Key: wifilozinka Wireless lozinka  
hexadecimal characters

SAVE
CANCEL

Kod opcije "SSID" upišite kako želite da Vam se zove wireless mreža.

Kod opcije "Authentication Type" izaberite u meniju "WPA-PSK/WPA2-PSK".

Kod opcije "Pre-Shared Key" upišite lozinku za Vašu wireless mrežu (osam karaktera je minimum).

Kliknite na dugme "Save" (ostaće na istoj strani kad sačuva podatke).

## Svetlosni indikatori (sijalice)

Power	svetli	uređaj je uključen
	ne svetli	uređaj je isključen
ADSL	ne svetli	nema ADSL signala
	treperi	sinhronizuje se
Internet	svetli	ima ADSL signal
	svetli (sa treperenjem)	uspostavljena internet konekcija
WLAN (wireless)	ne svetli	nije uspostavljena internet konekcija
	svetli	wireless mreža nije uključena
1-4 (LAN portovi)	ne svetli	wireless mreža nije uključena
	svetli	uključen uređaj u taj LAN port
WPS	ne svetli	nema priključenog uređaja u tom LAN portu
	svetli	omogućeno upravljanje wirelessom preko WPS-a /ne treba koristiti/
	ne svetli	nije omogućeno upravljanje wirelessom preko WPS-a