


Povežite opremu kao na slici:

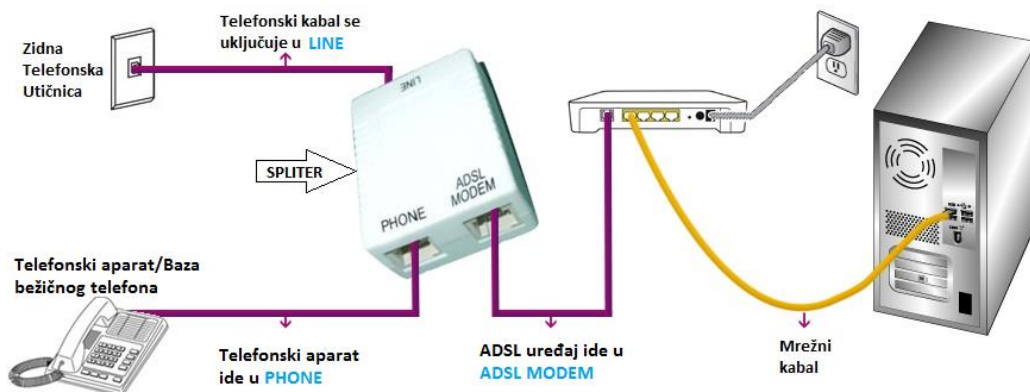

Potrebno je da pristupite ruteru tako što ćete otvoriti pretraživač i u adres bar upisati: **192.168.1.1** .Otvoriće se prozor u kome treba da se unese za username "**admin**" i za password "**admin**". Nakon ovog koraka moguće je podesiti uređaj.

Podešavanje konekcije

Izaberite u meniju opciju "**Interface Setup**" i podopciju "**Internet**".

Kod opcije "**Virtual Circuit**" izaberite klikom na strelicu "**PVC4**" /sa ovim izborom: **VPI** je **8**, a **VCI** je **35**/

Kod opcije "**ISP**" štiklirajte treću opciju "**PPPoA/PPPoE**"

Otvaraju se opcije:

Service name – ostavite prazno

User name – upišite Vaš user name /korisničko ime/ sa Ugovra u obliku **username@beotel**

Password – upišite Vašu lozinku sa Ugovra (velika i mala slova su bitna)

Kliknite na dugme "**Save**" /ostaće na istoj strani kad sačuva podatke/.

TP-LINK®
150Mbps Wireless N ADSL2+ Modem Router

Interface | Quick Start | **Interface Setup** | Advanced Setup | Access Management | Maintenance | Status | Help

Internet | LAN | Wireless

ATM VC

Virtual Circuit: **PVC4** | PVCs Summary

Status: Activated Deactivated

VPI: 8 (range: 0~255)

VCI: 35 (range: 1~65535)

QoS

ATM QoS: UBR

PCR: 0 cells/second

SCR: 0 cells/second

MBS: 0 cells

Encapsulation

ISP Dynamic IP Address
 Static IP Address
 PPPoA/PPPoE
 Bridge Mode

PPPoE/PPPoA

Service name:

Username:

Password:

Encapsulation: PPPoE LLC

Bridge Interface: Activated Deactivated

Connection Setting

Connection: Always On (Recommended)
 Connect On-Demand (Close if idle for 0 minutes)
 Connect Manually

TCP MSS Option: TCP MSS(default:1400) 1400 bytes

IP Address

Get IP Address: Static Dynamic

Static IP Address: 0.0.0.0

IP Subnet Mask: 0.0.0.0

Gateway: 0.0.0.0

NAT: Enable

Default Route: Yes No

TCP MTU Option: TCP MTU(default:1480) 1480 bytes

Dynamic Route: RIP2-B Direction: Both

Multicast: Disabled

MAC Spoofing: Enabled Disabled
00:00:00:00:00:00

SAVE

Podešavanje wireless-a

Izaberite u meniju opciju **“Interface Setup”** i podopciju **“Wireless”**.

Kod opcije **“SSID”** upišite kako želite da Vam se zove wireless mreža.

Kod opcije **“Authentication Type”** izaberite u meniju **“WPA-PSK/WPA2-PSK”**.

Kod opcije **“Pre-Shared Key”** upišite lozinku za Vašu wireless mrežu (osam karaktera je minimum).

Kliknite na dugme **“Save”**/ostaće na istoj strani kad sačuva podatke/.

Svetlosni indikatori (sijalice)

Power	svetli	uređaj je uključen
	ne svetli	uređaj je isključen
ADSL	ne svetli	nema ADSL signala
	treperi	sinhronizuje se
	svetli	ima ADSL signal
Internet	svetli (sa treperenjem)	uspostavljena internet konekcija
	ne svetli	nije uspostavljena internet konekcija
WLAN (wireless)	svetli	wireless mreža nije uključena
	ne svetli	wireless mreža nije uključena
1-4 (LAN portovi)	svetli	uključen uređaj u taj LAN port
	ne svetli	nema priključenog uređaja u tom LAN portu